

DIGITAL PANEL METERS



- ✓ SINGLE PHASE DIGITAL VOLTMETER-ME2V1
- ✓ SINGLE PHASE DIGITAL AMMETER-ME2A1
- ✓ THREE PHASE DIGITAL VOLTMETER-ME2V3
- ✓ THREE PHASE DIGITAL AMMETER-ME2A3
- ✓ SINGLE PHASE DIGITAL FREQUENCY METER-ME2F1


Available in Class 1.0 and Class 0.5 Accuracy

TRINITY ENERGY SYSTEMS PVT LTD


386, Savli G.I.D.C. Industrial Estate, Nr. Manjusar, At & Po: Alindra, Tal.: Savli, Dist. Vadodara - 391775 Gujarat, INDIA
Phone: +91-922 800 4452/53/54, Email: info@trinityenergy.co.in | www.trinityenergy.co.in

TECHNICAL DATA


Sr. No.	Parameters & Options	ME2V1	ME2A1	ME2V3	ME2A3	ME2F1	STATISTICS
1	Volts	Y	-	-	-	-	Direct Voltage Input : 25 to 500V L-L Burden : 0.5VA Secondary Voltage Input : 110V*
2	Volts RY	-	-	Y	-	-	
3	Volts YB	-	-	Y	-	-	
4	Volts BR	-	-	Y	-	-	
5	Current	-	Y	-	-	-	Secondary Current Input: 5A or 1A (Site Selectable) CT Primary: Site Selectable Burden: < 1.0VA Overload (Through CT): 5A CT6A RMS continuous 1A CT1.2A RMS continuous
6	Current R	-	-	-	Y	-	
7	Current Y	-	-	-	Y	-	
8	Current B	-	-	-	Y	-	
9	Frequency	-	-	-	-	Y	Accuracy : Class 1.0
10	DISPLAY	0.56" Red Seven Seg.	0.56" Red Seven Seg.	0.56" Red Seven Seg.	0.56" Red Seven Seg.	0.56" Red Seven Seg.	
11	Bezel				96 X 96 mm		
12	Depth				65 mm		
							DIN enclosure

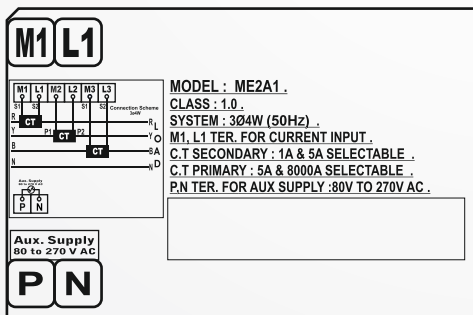


ME2A1_BACK

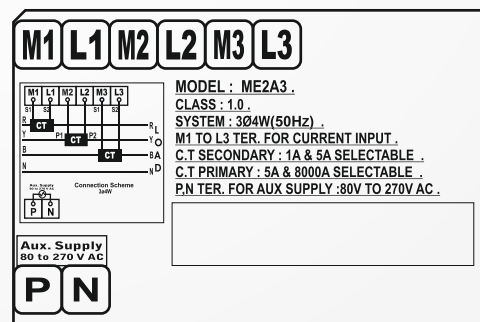

ME2A3_BACK

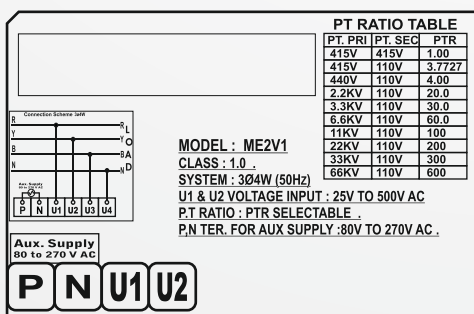

ME2V1_BACK

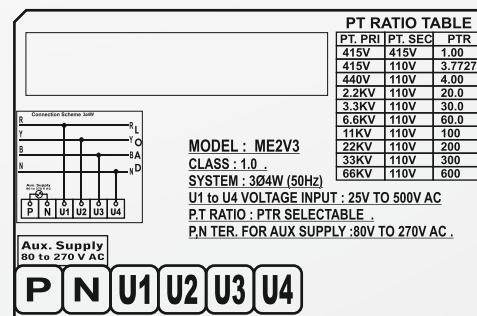

ME2V3_BACK