

E1000 is a state-of-the-art Digital KWh Meter. The meter meets the accuracy requirements of class 1.0s as per the IS13779 and is available in 1P2W and 3P4W versions, in current ranges of 5-30A and 10-60A.

The meter is equipped with RS485 communication port for implementation of EMS/BMS in a PC or SCADA environment.

It is a dual source meter, and has two energy registers.

E1000 is guaranteed to work in harsh noisy environments, and meets or exceeds the regulatory requirements for EMI/EMC, voltage and frequency disturbances, faults, etc.


Typical Applications include: -


Shopping Malls & Multiplexes, Residential Townships, Commercial Buildings, LT industrial loads and many more.

Technical Specifications


System	1P2W or 3P4W, 3 X 240 VAC
Measurement Parameters	Active Energy (KWh) (Range of Reading): 0 to 9999999.9 Reactive Energy (KVARh) (Range of Reading): 0 to 9999999.9 –Optional
Accuracy	Class 1.0 as per IS-13779. Class 0.5s Optional
Current	Ibasic : 5A or 10 A Imax : 30A or 60 A
Minimum starting current	0.4 % of Ibasic
Frequency of operation	50 Hz. ±10 %.
Display	Customized alphanumeric LCD
Burden	Voltage circuit : < 1.8VA per phase. Current circuit : < 0.80VA per phase
Calibration output	LED pulses @ 1000 Pulses/KWh
Data Retention	In Ferro-magnetic non-volatile memory, no battery. Data retention 15 years without power
Operating temperature Range	0 - 60°C
Humidity	0 - 95% Non-condensing
Casing material	ABS Plastic
Dimensions	Height= 230 mm, Length = 145 mm, Depth = 70mm
Weight	1.5 Kgs
Mounting	Projection Type

Dimension Drawing

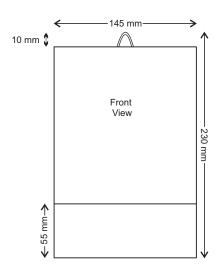

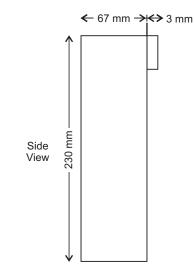

Connection Drawing

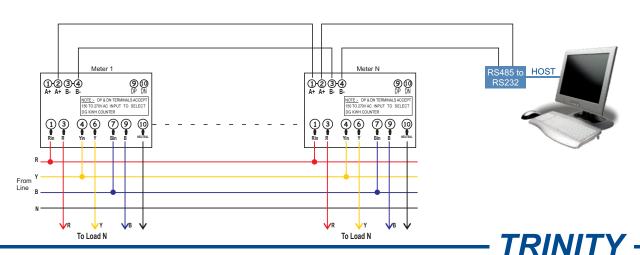

TRINITY ENERGY SYSTEMS PVT. LTD.

366/A/12, G.I.D.C. Estate, Makarpura, VADODARA-390010, Gujarat, India Tele/ Fax.: 0265 - 2645738/ 2633270/ 2632761 email: info@trinityenergy.co.in

web : www.trinityenergy.co.in



Making Energy Matter

