

DIGITAL ENERGY METERS

INFINITY




Infinity, from Trinity are micro-controller based digital energy meters for use in three phase electrical systems for sub-metering applications. The design of these meters is based on proven micro-controller technology; with front end ASICs resulting in compact and accurate energy metering. The accuracy of the meters is maintained even under severely distorted waveform conditions which occur due to harmonics in the system.

Infinity is the advanced model with bright 16 x 1 LC display having additional features like RS485 port, dual source measurement and whole current measurement up to 60A.


FEATURES

- Class 1.0s accuracy as per IS13779
- Class 0.5 accuracy also available
- Micro-controller based
- Backlit 16x1 LC Display with dual source
- RS 485 communication port with MODBUS-RTU protocol
- Hanging CT with 60AMPS, 90AMPS and 150 AMPS
- Available with single phase and three phase with RS485 + dual source

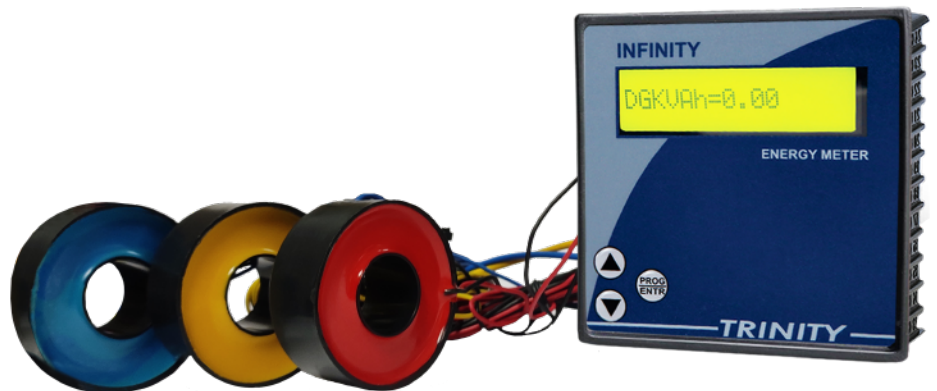

TECHNICAL DATA

Parameter		
TYPE	NAME	STATISTICS
INPUT	Supply	Three Phases and Neutral of a 3P4W system/
	Voltage	Direct Voltage Input : Up to 300 V L-N or 500 V L-L Burden : 0.5 VA
	Current	Current Input : (Whole Current) upto 60A (90A & 150A specified at the time of ordering) Burden : <1.0VA (Whole Current) : 120% of I _{max} continuous
	Auxiliary Power Supply	Operating Voltage for SMPS : 80 VAC — 480 VAC, 50-60 Hz
COMM.	RS485 Port	Supporting MODBUS-RTU protocol
MEASUREMENT	Total Active Energy (KWh)	Range of Reading : 0 to 9999999.9 KWh Accuracy : 1.0 S as per IS13779
MISCELLANEOUS	Dimen.	Bezel : 96 x 96 mm
		Panel Cutout : 92 X 92 mm
		Depth of installation : 55 mm
	Operating temp : 0° C to 60 °C	
	Weight : 0.3 Kgs	
	Min. Operating Current : 0.4A	
	Dual Source Sensing : By presence or absence of across two terminals can be looped	

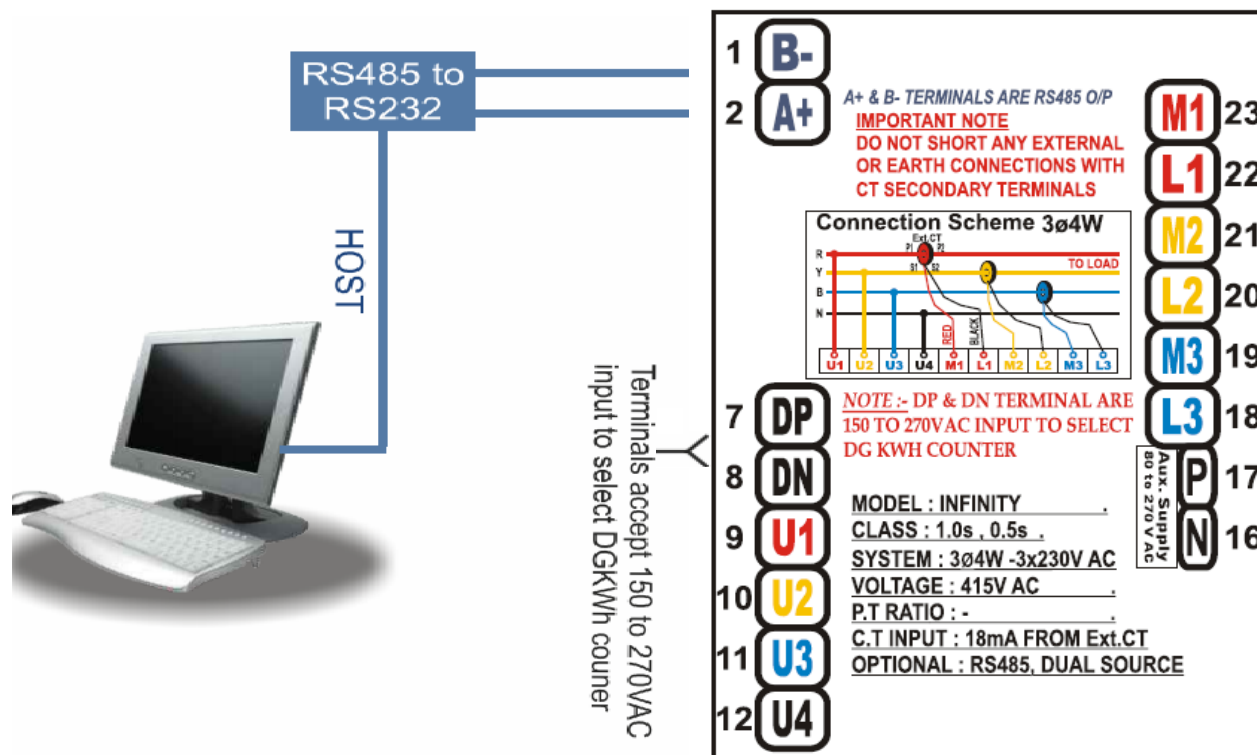

TRINITY

TRINITY ENERGY SYSTEMS PVT LTD

366/A/12, G.I.D.C. Estate, Makarpura, VADODARA-390010, Gujarat, India
Tele/ Fax. : 0265 - 2645738/ 2633270/ 2632761

Email: sales trinityenergy.co.in
Web: www.trinityenergy.co.in

* Specifications are subject to change without notice due to continuous improvement

